


# Use an API Key to Make Calls

Last Modified on 04/12/2023 12:48 pm EDT

## To use an API key in the Swagger interface:

1. Log in as an admin and select the appropriate org, if required.
2. Navigate to **Admin > Swagger Docs**.
3. Click the resource from the list to open the Swagger interface in a new tab.
4. Expand a supported endpoint.
5. Enter the API key in the **x-api-key** field to authenticate the call.
6. **Optional:** If impersonation is enabled, enter the ID of the user who will be impersonated. Impersonation can only be enabled by a member of Resolver Support. See [Impersonation with an API Key](#) for more details.

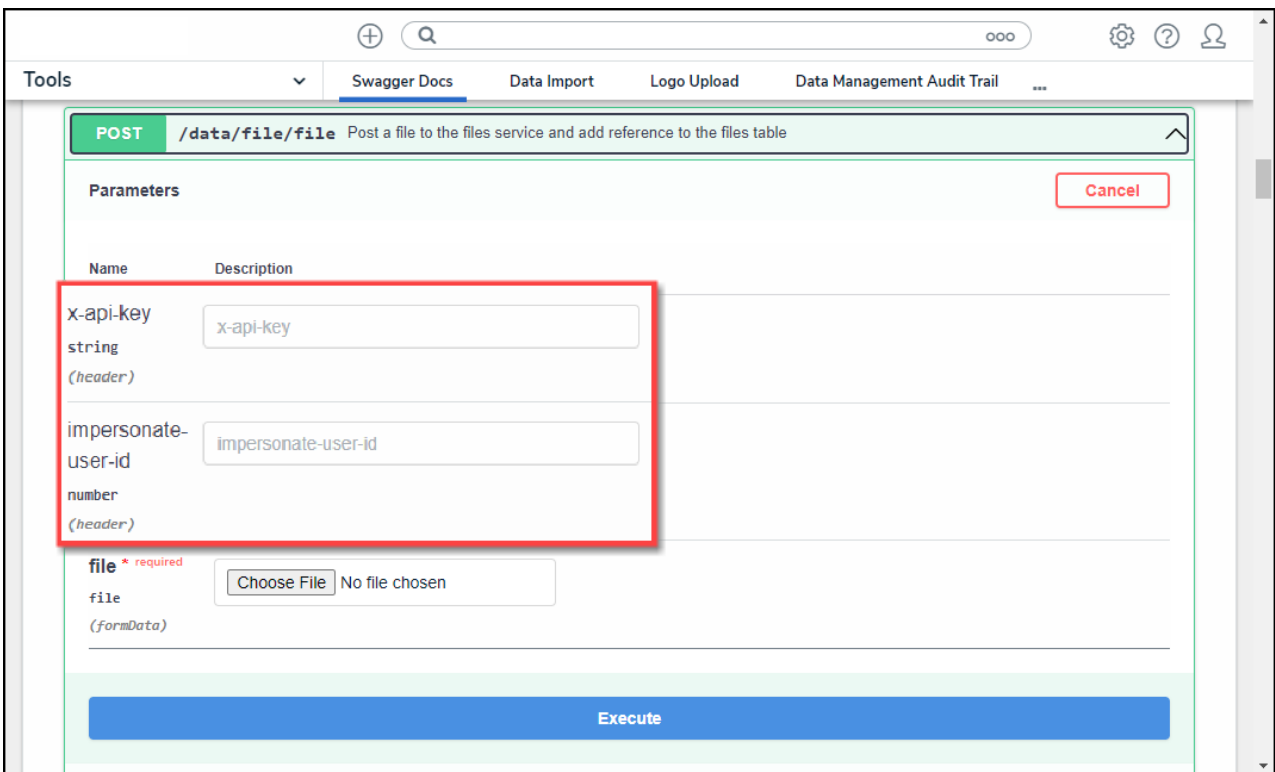

The `POST /data/file/file` endpoint in the **file** service

7. Complete the remainder of the fields as required.

## Example

```
curl -X POST --header 'Content-Type: multipart/form-data' --header 'Accept: application/json' --header 'x-api-key: YOUR_'
```

