

# Locating an Org's ID


Last Modified on 11/08/2024 10:21 am EST

## Overview

An Organization's ID is used to execute multiple Swagger endpoints.


## Navigation

1. Navigate to a browser, either Chrome™ or Edge®.
2. Log into the Resolver application.
3. From the **Home** screen, click the **F12** key on the connected keyboard.
4. From the **DevTools** pop-up, click the **+** button.

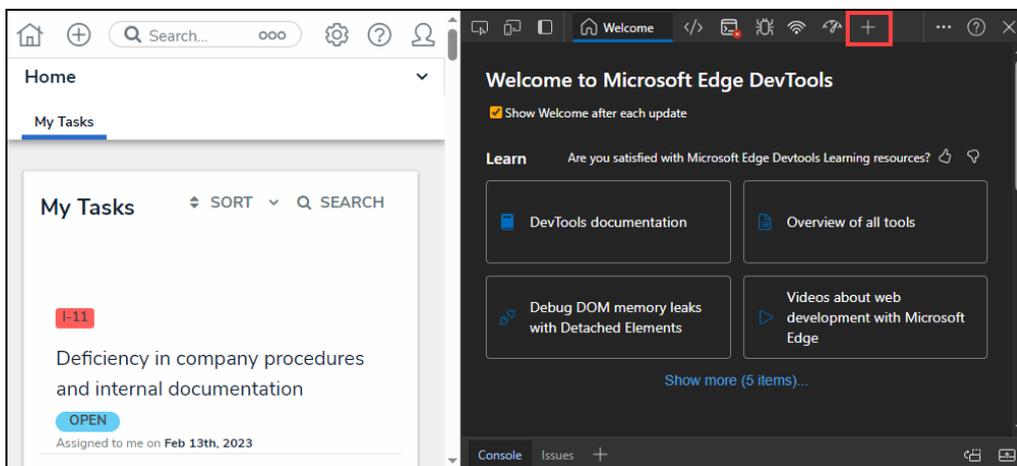


*Plus Button*

5. Select **Applications** from the dropdown menu.

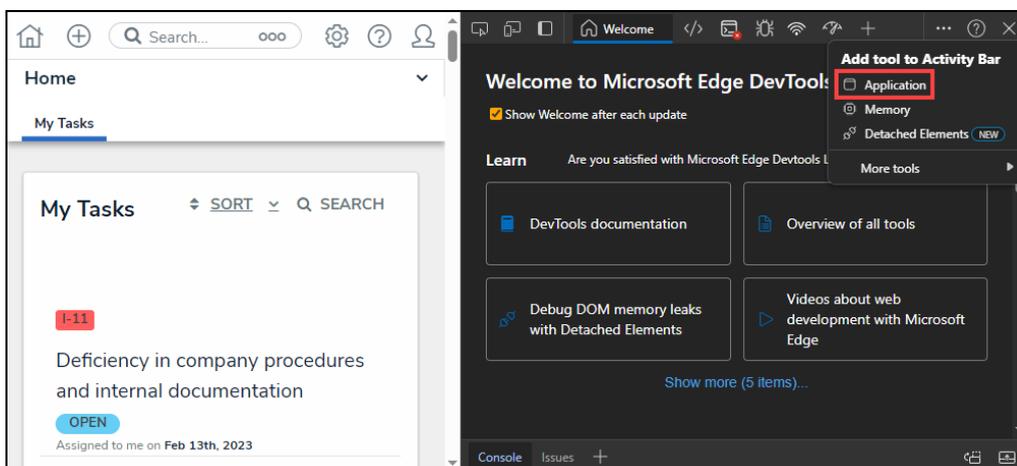


*Applications Link*

6. From the **Applications** screen, expand the **Local Storage** node.

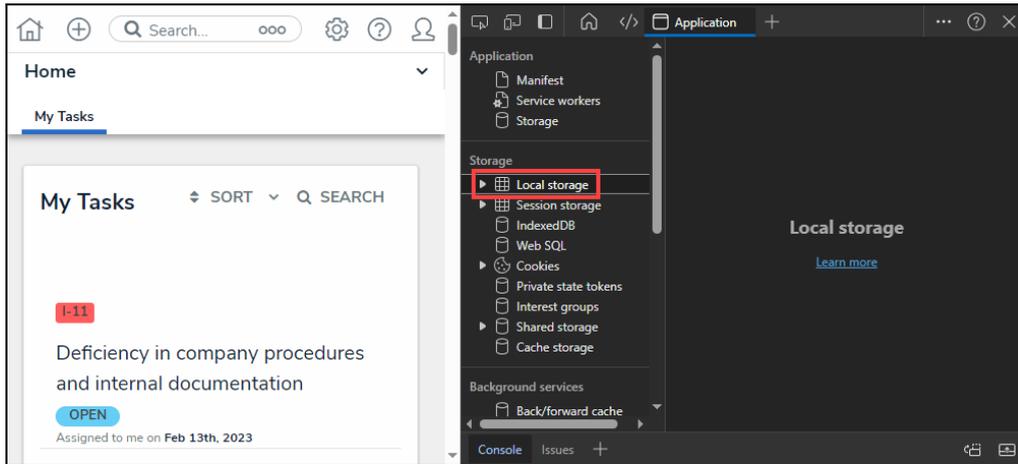

*Local Storage Node*


7. Click on the **Resolver URL**.

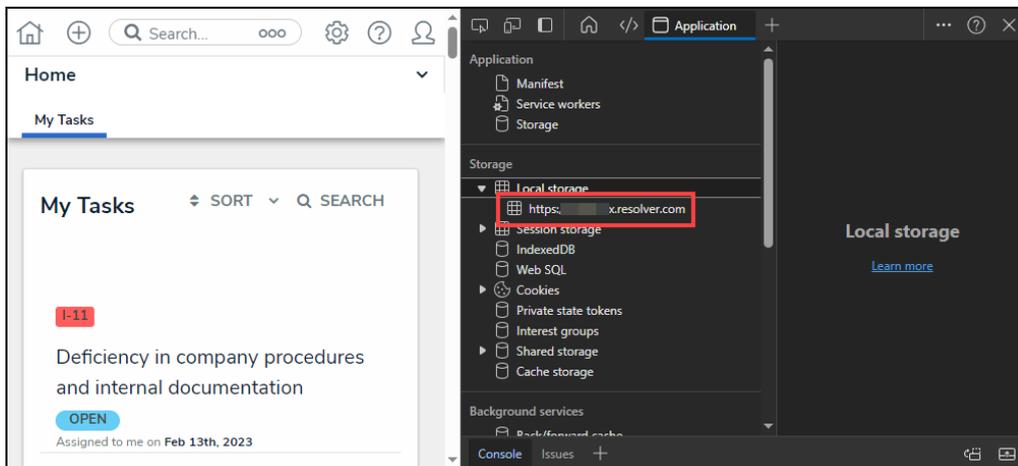

*Resolver URL*

## Locating an Org's ID

- From the **Local Storage** screen, locate the **last-selected-org** label. The organization's ID will be listed after the label.

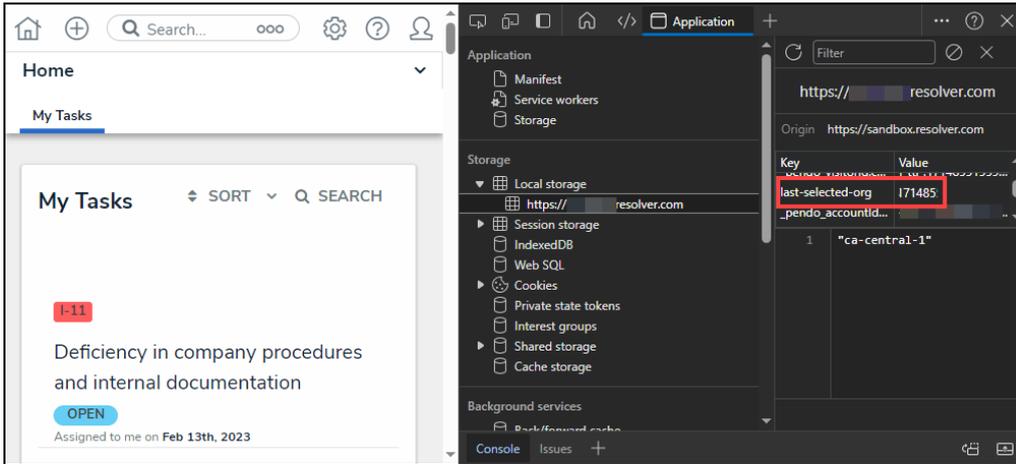

*last-selected-org*